



Pre-heater Mesh Belt

ENT-12EEWL

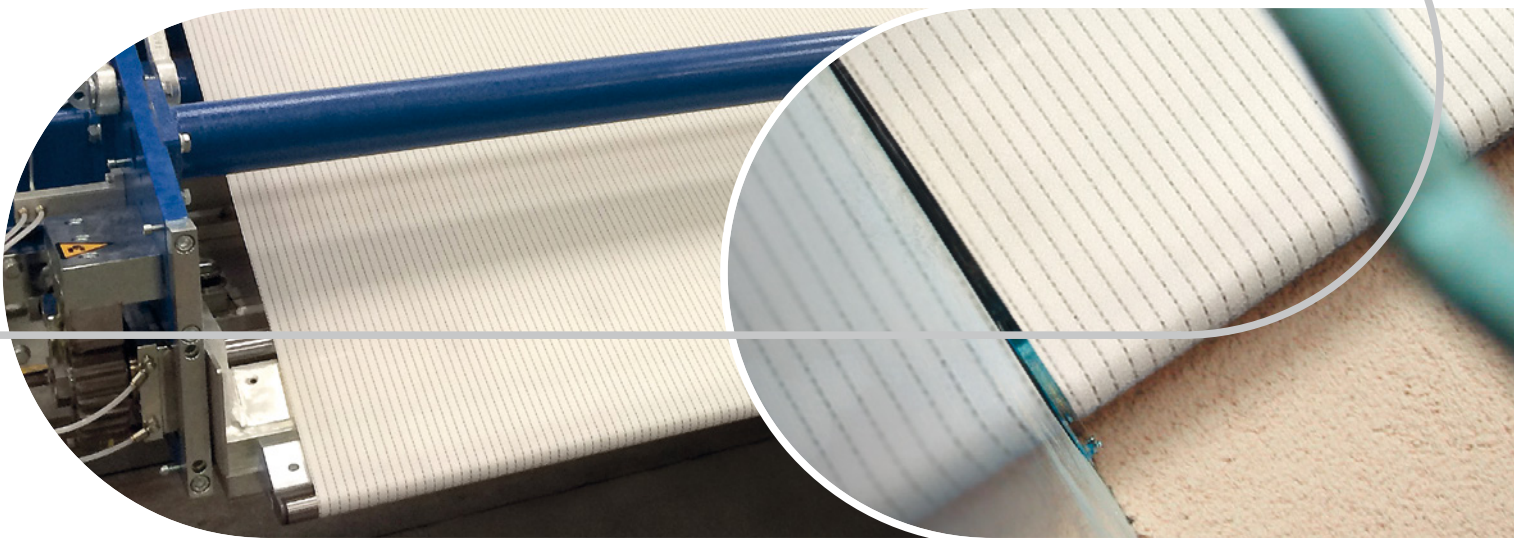

The ENT-12EEWL is specifically designed to meet the requirements of a pre-heater mesh belt in processing lines for OSB, particle boards, or MDF wood panels. Increasing the temperature of the wood-resin mixture before it reaches the press enables faster curing and increased speed of the production line, which in turn results in increased productivity of 15% to 30%.




Habasit's ENT-12EEWL is the ideal processing belt for this application, offering:

- Constant airflow over the joint thanks to its endless woven structure and single-loop seam joint
- Suitability for nosebars and small pulley diameters
- No shrinking effect in the hot environment due to edges finished by a melting process
- No wood fiber clogging issues – which allows reliable air permeability
- Long lifetime due to its robust and durable belt design offering high abrasion and hydrolysis resistance
- Fast installation of the single-loop joint without dismantling the whole pre-heater machine, which limits downtimes and yield losses for end users

Pre-heater Mesh Belt ENT-12EEWL

Key features	Your benefits
<ul style="list-style-type: none"> • High temperature stability 	<ul style="list-style-type: none"> • High operating temperatures: 130 °C continuous, 150 °C short-term peak temperature • Fast curing and increased productivity
<ul style="list-style-type: none"> • Hydrolysis resistance • Single-loop seam joining 	<ul style="list-style-type: none"> • Suitable for steam treatment • Fast installation • Constant airflow over the complete belt length
<ul style="list-style-type: none"> • No clogging of wood fibers 	<ul style="list-style-type: none"> • Long lifetime • Constant airflow throughout belt life
<ul style="list-style-type: none"> • Anti-static properties 	<ul style="list-style-type: none"> • Safe running of the production line • Good release properties

Cross-section

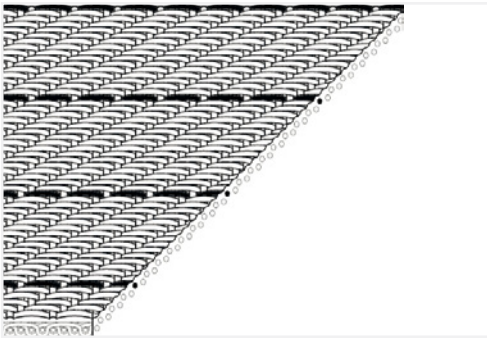

Mesh belt: Polyester (PET) fabric, white

Technical key data

Thickness		Mass		Tensile force k1%		Tensile force k1% relaxed		Max. operating temperature	
mm	inch	kg/m ²	lb/sqft	N/mm	lbf/in	N/mm	lbf/in	°C	°F
1.4	0.053	1.3	0.266	14	80	10	57	130	266

Information provided herein does not constitute legal representations or warranties and may change without notice. Please refer to the specifications/disclaimers provided in the respective product data sheets.

For further information
choose country selection
Habasit Worldwide on:

www.habasit.com

Habasit AG

CH-4153 Reinach-Basel
Phone: +41 61 715 15 15
Fax: +41 61 715 15 55
E-mail: info@habasit.com

Copyright Habasit AG
Subject to alterations

4410SRF.CVB-en0418HOR